

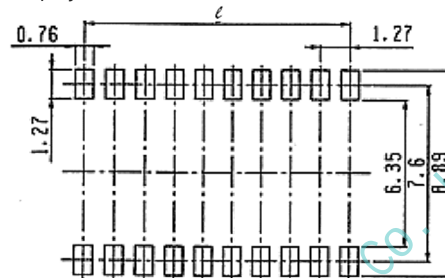
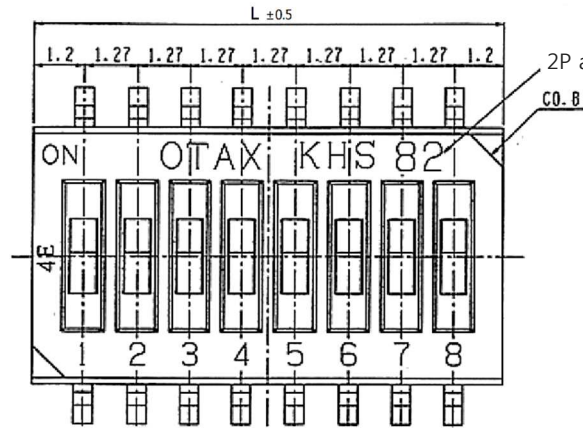



MRK.	DATE	REVISION	SIGN
△			



PCB DIMENSION

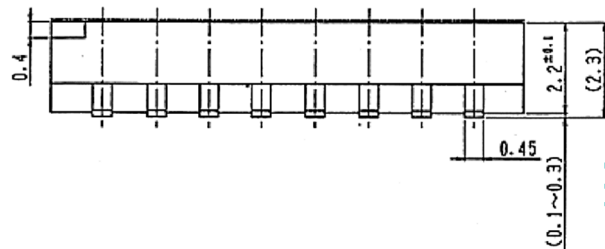

PART A

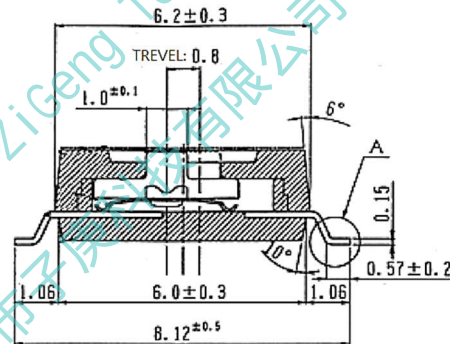

SPECIFICATION

- RATING : DC 24V 25mA (Switching)
DC 50V 100mA (Non-Switching)
- CONTACT RESISTANCE : 100mΩ MAX. (DC 2V 10mA)
- INSULATION RESISTANCE : DC 100V 100MΩ MIN.
- WITHSTAND VOLTAGE : 300V AC 1 minute.
- LIFE CYCLE : 1,000 CYCLES
- OPERAING FORCE : 4.9N MAX.

MODEL	POLE	L (mm)	ℓ (mm)
KHS-22C	2	3.67	1.27
KHS-42C	4	6.21	3.81
KHS-62C	6	8.75	6.35
KHS-82C	8	11.29	8.89
KHS-102C	10	13.83	11.43

01	-	-	-	1	-
NO.	DESCRIPTION	MATERIAL	COLOR/FINISH	Q.TY	VENDOR
DRAW/DESIGNED	CHECKED	APPROVED	⊗	G.TOL	TITLE
W.J.LEE	J.P.ROH	K.I.LEE	UNIT	±0.2	DIP SWITCH
			mm	SCALE	MODEL
			SIZE	4:1	KHS-XX2C
			A4	DRAW NO.	KHS-002C-0T-01
					SHEET
					1/1